

# TECHNICAL DATA SHEET

## ATMOS XS IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

□ 228x228 mm

Material : CALCYT® plaster





reddot design award  
winner 2010

**DESIGN PLUS**  
powered by: light+building



product  
design  
award

2011 ■

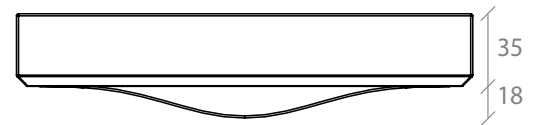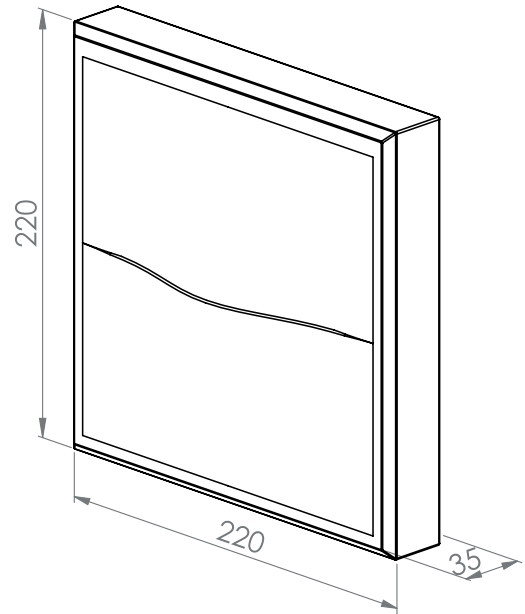

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz - □ - current controlled  
▽ - CE - IP20 - 350mA - not dimmable

### ATMOS XS LED DIM 100 LM

REF N° 140 60 501 CRI 80 warm white 2200°K

REF N° 140 60 001 CRI 90 warm white 2700°K

REF N° 140 60 101 CRI 90 warm white 3000°K

REF N° 140 60 201 CRI 90 neutral white 4000°K

REF N° 140 60 301 royal blue

◇ - 1W - excl. LED driver - current  
controlled 350 mA - ▽ - A - E  
CE - ⊕ - serial wiring - 3 Step MacAdam  
Requires remote LED driver - 350 mA

### REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V

REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz - □ - current controlled  
▽ - CE - IP20 - 350mA - dimmable

Ready for installation in solid walls  
Optional plasterkit for installation into gypsum walls

### PLASTERKIT ATMOS XS

REF N° 740 01 000 For mounting into gypsum walls

Housing: perforated aluminium

225x225 mm