

TECHNICAL DATA SHEET


200CENT ROUND 750LM SWING 90 TRIM IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Adjustable 0° - 90°

Ø27 mm - h = 70 mm

Material: Aluminium



200CENT ROUND SWING 90 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 553 29 530	REF N° 553 29 930	REF N° 553 29 830	REF N° 553 29 730

6,2 W - 750LM - 2 step MacAdam - **A+**
Serial wiring - - **CE** - -
Requires remote LED driver - 250mA
Standard beam angle 36°

REMOTE LED DRIVER ON/OFF

REF N° 697 00 040 min.2W max. 30W

REF N° 697 00 080 min.27W max. 67W

230V/50Hz - - current controlled
 - **CE** - IP20 - 250mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 30W




1-10V DALI PUSH

REF N° 697 30 070 min 33W max 65W DALI

REF N° 697 60 080 min 27W max 67W 1-10V PUSH


REF N° 697 72 020 min 6W max 12,5W PHASE DIM

230V/50Hz - - current controlled
 - **CE** - IP20 - 250mA - dimmable

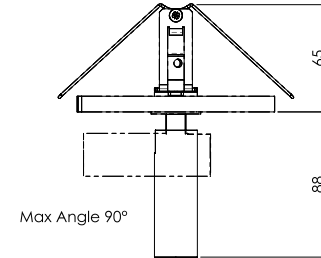

INSTALLATION KIT

REF N° 680 01 027 standard holesaw Ø 27 mm

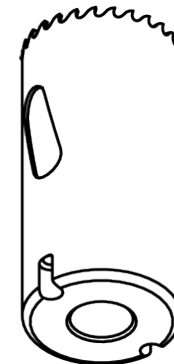

BEAM ANGLES

STANDARD (included) beam angle 36°