

# TECHNICAL DATA SHEET

## WASAABII XL 500LM FIX SURFACE IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

Surface mounted

Material: Aluminium + Aluminium Tube



### Ref N° 1100 BLACK

Black  
Nero  
Schwarz  
Zwart  
Noir  
Negro



### Ref N° 1100 WHITE

White  
Bianco  
Weiß  
Wit  
Blanc  
Blanco



### Ref N° 1100 GREY

Grey  
Grigio  
Grau  
Grijs  
Gris  
Gris



### Ref N° 1100 MESSING

Brass  
Otonne  
Messing  
Messing  
Laiton  
Latón



### Ref N° 1100 BRONZE

Bronze  
Bronzo  
Bronze  
Bronz  
Bronze  
Bronze



### Ref N° 1101 00 001


Clip-on assessorly 1  
Small ball

WASAABII XL FIX SURFACE IP54 500LM CRI 92			
	2700°K	3000°K	
60cm REF N°	1132 28 906	1132 28 806	REF N° 60cm
90cm REF N°	1132 28 909	1132 28 809	REF N° 90cm
120cm REF N°	1132 28 912	1132 28 812	REF N°120cm

5,9 W - 500LM - 2 step MacAdam - **A+**  
 Serial wiring - - - -   
 Requires remote LED driver - 700mA  
 Standard Perfectbeam 24° - Optional 44° beam  
 Ultra low glare (UGR < 13)

REMOTE LED DRIVER ON/OFF	
REF N° 697 00 015	min.2W max. 32W
REF N° 697 00 025	min.2W max. 50W
230V/50Hz -  - current controlled	
-  - IP20 - 700mA - not dimmable	

REMOTE LED DRIVER DIM	
REF N° 697 60 040	min.3W max. 60W
1-10V DALI PUSH	
REF N° 697 30 015	min 2W max 20W DALI
REF N° 697 60 015	min 2W max 20W 1-10V PUSH
REF N° 697 77 010	min 2W max 10W PHASE DIM
REF N° 697 77 020	min 11W max 20W PHASE DIM
230V/50Hz -  - current controlled	
-  - IP20 - 700mA - dimmable	

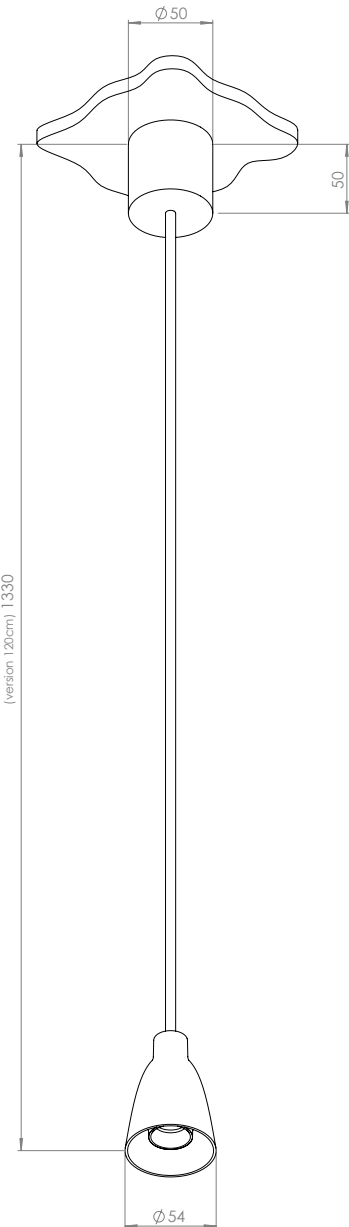

**BEAM ANGLES**  
**STANDARD** (included) beam angle 24°  
**REF N° 203 20 044** (option) beam angle 44°