

TECHNICAL DATA SHEET

WASAABII XL 1000LM FIX SURFACE IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

Surface mounted

Material: Aluminium + Aluminium Tube



Ref N° 1100 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



Ref N° 1100 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco



Ref N° 1100 GREY

Grey
Grigio
Grau
Grijs
Gris
Gris



Ref N° 1100 MESSING

Brass
Otonne
Messing
Messing
Laiton
Latón



Ref N° 1100 BRONZE

Bronze
Bronzo
Bronze
Brons
Bronze
Bronce



Ref N° 1101 00 001


Clip-on assessorly 1
Small ball

WASAABII XL FIX SURFACE IP54 1000LM CRI 92			
	2700°K	3000°K	
60cm REF N°	1132 26 906	1132 26 806	REF N° 60cm
90cm REF N°	1132 26 909	1132 26 809	REF N° 90cm
120cm REF N°	1132 26 912	1132 26 812	REF N°120cm

8,3 W - 1000LM - 2 step MacAdam - **A+**
 Serial wiring - - **CE** - -
 Requires remote LED driver - 700mA
 Standard beam angle 28°
 Optional beam angle 44°

REMOTE LED DRIVER ON/OFF	
REF N° 697 00 015	min.2W max. 32W
REF N° 697 00 025	min.2W max. 50W
230V/50Hz - - current controlled	
- CE - IP20 - 700mA - not dimmable	

REMOTE LED DRIVER DIM	
REF N° 697 60 040	min.3W max. 60W
1-10V DALI PUSH	
REF N° 697 30 015	min 2W max 20W DALI
REF N° 697 60 015	min 2W max 20W 1-10V PUSH
REF N° 697 77 010	min 2W max 10W PHASE DIM
REF N° 697 77 020	min 11W max 20W PHASE DIM
230V/50Hz - - current controlled	
- CE - IP20 - 700mA - dimmable	

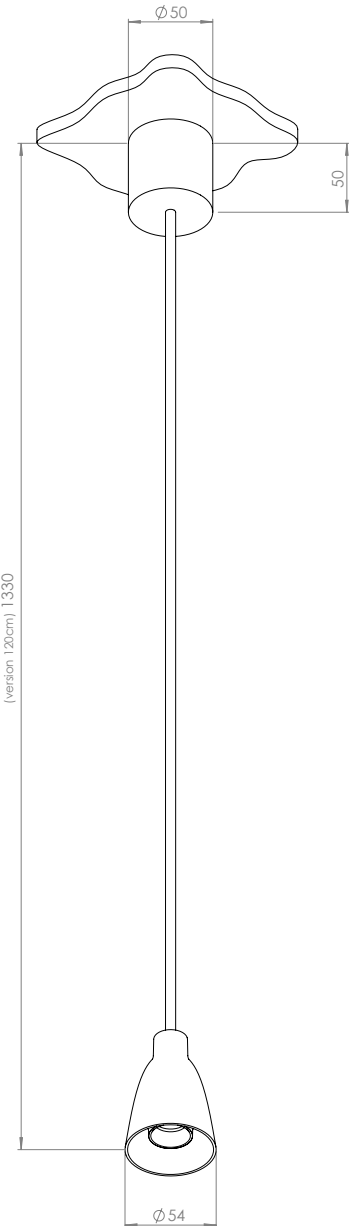

BEAM ANGLES
STANDARD (included) beam angle 28°
REF N° 203 20 044 (option) beam angle 44°