

TECHNICAL DATA SHEET


WASAABII XL 1000LM FIX SOFT TRIMLESS IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

114x134 mm - h = 70 mm

Material: CALCYT® plaster + Aluminium Tube



Ref N° 1100 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



Ref N° 1100 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco



Ref N° 1100 GREY

Grey
Grigio
Grau
Grijs
Gris
Gris



Ref N° 1100 MESSING

Brass
Otonne
Messing
Messing
Laiton
Latón



Ref N° 1100 BRONZE

Bronze
Bronzo
Bronze
Bronze
Bronze
Bronce



Ref N° 1101 00 001

Clip-on assessorry 1
Small ball

WASAABII XL FIX SOFT TRIMLESS IP54 1000LM CRI 92

	2700°K	3000°K	
60cm REF N°	1129 26 906	1129 26 806	REF N° 60cm
90cm REF N°	1129 26 909	1129 26 809	REF N° 90cm
120cm REF N°	1129 26 912	1129 26 812	REF N°120cm

8,3 W - 1000LM - 2 step MacAdam - **A+**
Serial wiring - - **CE** - -
Requires remote LED driver - 700mA
Standard beam angle 28°
Optional beam angle 44°

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled
 - **CE** - IP20 - 700mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 60W

1-10V DALI PUSH

REF N° 697 30 015 min 2W max 20W DALI


REF N° 697 60 015 min 2W max 20W 1-10V PUSH

REF N° 697 77 010 min 2W max 10W PHASE DIM

REF N° 697 77 020 min 11W max 20W PHASE DIM

230V/50Hz - - current controlled
 - **CE** - IP20 - 700mA - dimmable

(version 60cm) 655
(version 90cm) 955
(version 120cm) 1255

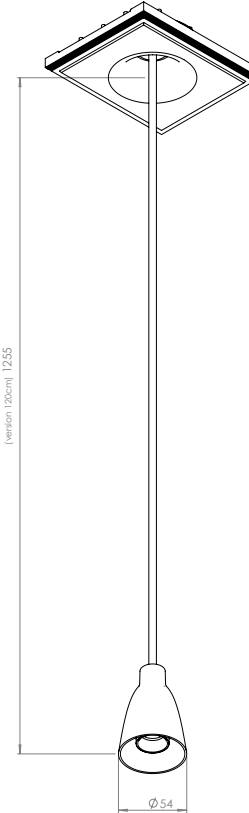

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 -12 -15 mm

REF N° 200 99 025 installation system for gypsum ceiling 25 mm

REF N° 200 99 030 installation system for gypsum ceiling 30 mm

BEAM ANGLES

STANDARD (included) beam angle 28°

REF N° 203 20 044 (option) beam angle 44°