

# TECHNICAL DATA SHEET


## WASAABII XL 500LM FIX SOFT TRIMLESS IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

114x134 mm - h = 70 mm

Material: CALCYT® plaster + Aluminium Tube



### Ref N° 1100 BLACK

Black  
Nero  
Schwarz  
Zwart  
Noir  
Negro



### Ref N° 1100 WHITE

White  
Bianco  
Weiß  
Wit  
Blanc  
Blanco



### Ref N° 1100 GREY

Grey  
Grigio  
Grau  
Grijs  
Gris  
Gris



### Ref N° 1100 MESSING

Brass  
Otonne  
Messing  
Messing  
Laiton  
Latón



### Ref N° 1100 BRONZE

Bronze  
Bronzo  
Bronze  
Bronz  
Bronze  
Bronce



### Ref N° 1101 00 001

Clip-on accessory 1  
Small ball

### WASAABII XL FIX SOFT TRIMLESS IP54 500LM CRI 92

	2700°K	3000°K	
60cm REF N°	1129 28 906	1129 28 806	REF N° 60cm
90cm REF N°	1129 28 909	1129 28 809	REF N° 90cm
120cm REF N°	1129 28 912	1129 28 812	REF N°120cm

5,9 W - 500LM - 2 step MacAdam - **A+**  
Serial wiring - - - -   
Requires remote LED driver - 700mA  
Standard Perfectbeam 24° - Optional 44° beam  
Ultra low glare (UGR < 13)

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled  
 - - IP20 - 700mA - not dimmable

### REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 60W

1-10V DALI PUSH

REF N° 697 30 015 min 2W max 20W DALI


REF N° 697 60 015 min 2W max 20W 1-10V PUSH

REF N° 697 77 010 min 2W max 10W PHASE DIM

REF N° 697 77 020 min 11W max 20W PHASE DIM

230V/50Hz - - current controlled  
 - - IP20 - 700mA - dimmable

(version 60cm) 655  
(version 90cm) 955  
(version 120cm) 1255

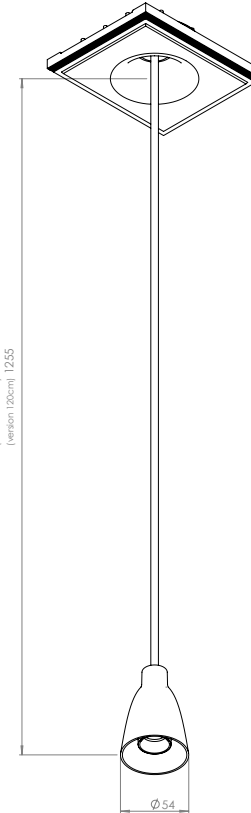

### INSTALLATION KIT

**STANDARD** (included) installation system for ceiling 9 -12 -15 mm

REF N° 200 99 025 installation system for gypsum ceiling 25 mm

REF N° 200 99 030 installation system for gypsum ceiling 30 mm

### BEAM ANGLES

**STANDARD** (included) beam angle 24°

REF N° 203 20 044 (option) beam angle 44°