

TECHNICAL DATA SHEET

WASAABII 1x500LM SURFACE UNO IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable 0° - 80°

Surface mounted

Material: Aluminium



Ref N° 1100 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



Ref N° 1100 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco



Ref N° 1100 GREY

Grey
Grigio
Grau
Grijs
Gris
Gris



Ref N° 1100 MESSING

Brass
Otonne
Messing
Messing
Laiton
Latón



Ref N° 1100 BRONZE

Bronze
Bronzo
Bronze
Bronz
Bronze
Bronze



Ref N° 1101 00 001

Clip-on accessory 1
Small ball

WASAABII SURFACE UNO 1x500LM CRI 92 PHASE DIM

2700°K	3000°K	
REF N° 1159 78 930	REF N° 1159 78 830	

1x5,9W- 1x500LM- 2stepMacAdam - **A+**
Parallel wiring - 230VAC - - -
Integrated phase dimmable LED driver -
Standard Perfectbeam 24°- Optional 44° beam

WASAABII SURFACE UNO 1x500LM CRI 92 1-10V DIM



2700°K	3000°K	
REF N° 1159 68 930	REF N° 1159 68 830	

1x5,9W- 1x500LM- 2stepMacAdam - **A+**
Parallel wiring - 230VAC - - -
Integrated 1-10V dimmable LED driver -
Standard Perfectbeam 24°- Optional 44° beam

WASAABII SURFACE UNO 1x500LM CRI 92 DALI DIM

2700°K	3000°K	
REF N° 1159 38 930	REF N° 1159 38 830	

1x5,9W- 1x500LM- 2stepMacAdam - **A+**
Parallel wiring - 230VAC - - -
Integrated DALI dimmable LED driver -
Standard Perfectbeam 24°- Optional 44° beam

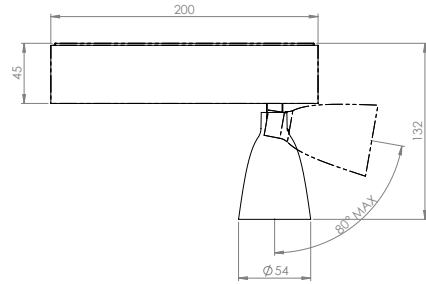

BEAM ANGLES

STANDARD (included) beam angle 24°
REF N° 203 20 044 (option) beam angle 44°