

# TECHNICAL DATA SHEET

## WASAABII 1x200LM SURFACE UNO IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable 0° - 80°

Surface mounted

Material: Aluminium



### Ref N° 1100 BLACK

Black  
Nero  
Schwarz  
Zwart  
Noir  
Negro



### Ref N° 1100 WHITE

White  
Bianco  
Weiß  
Wit  
Blanc  
Blanco



### Ref N° 1100 GREY

Grey  
Grigio  
Grau  
Grijs  
Gris  
Gris



### Ref N° 1100 MESSING

Brass  
Otonne  
Messing  
Messing  
Laiton  
Latón



### Ref N° 1100 BRONZE

Bronze  
Bronzo  
Bronze  
Bronz  
Bronze  
Bronze



### Ref N° 1101 00 001

Clip-on assessorly 1  
Small ball

### WASAABII SURFACE UNO 1x200LM CRI 92 PHASE DIM

2700°K	3000°K
REF N° 1159 77 930	REF N° 1159 77 830

1x 2W - 1x 200LM - 2 step MacAdam - **A+**  
Parallel wiring - 230VAC - - - -   
Integrated phase dimmable LED driver -  
Standard narrowbeam 12° - Optional 8° beam

### WASAABII SURFACE UNO 1x200LM CRI 92 1-10V DIM



2700°K	3000°K
REF N° 1159 67 930	REF N° 1159 67 830

1x 2W - 1x 200LM - 2 step MacAdam - **A+**  
Parallel wiring - 230VAC - - - -   
Integrated 1-10V dimmable LED driver -  
Standard narrowbeam 12° - Optional 8° beam

### WASAABII SURFACE UNO 1x200LM CRI 92 DALI DIM

2700°K	3000°K
REF N° 1159 37 930	REF N° 1159 37 830

1x 2W - 1x 200LM - 2 step MacAdam - **A+**  
Parallel wiring - 230VAC - - - -   
Integrated DALI dimmable LED driver -  
Standard narrowbeam 12° - Optional 8° beam

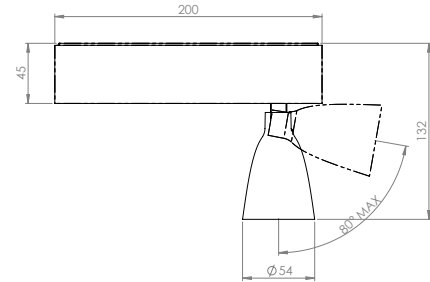

### BEAM ANGLES

**STANDARD** (included) beam angle 12°  
REF N° 203 20 008 (option) beam angle 8°