

TECHNICAL DATA SHEET

WASAABII 2x200LM SURFACE DUO IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable 0° - 80°

Surface mounted

Material: Aluminium



Ref N° 1100 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



Ref N° 1100 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco



Ref N° 1100 GREY

Grey
Grigio
Grau
Grijs
Gris
Gris



Ref N° 1100 MESSING

Brass
Otonne
Messing
Messing
Laiton
Latón



Ref N° 1100 BRONZE

Bronze
Bronzo
Bronze
Bronz
Bronze
Bronze



Ref N° 1101 00 001

Clip-on accessory 1
Small ball

WASAABII SURFACE DUO 2x200LM CRI 92 PHASE DIM

2700°K	3000°K
REF N° 1156 77 930	REF N° 1156 77 830

2x 2W - 2x 200LM - 2 step MacAdam - **A+**
Parallel wiring - 230VAC - - - -
Integrated phase dimmable LED driver -
Standard narrowbeam 12° - Optional 8° beam

WASAABII SURFACE DUO 2x200LM CRI 92 1-10V DIM




2700°K	3000°K
REF N° 1156 67 930	REF N° 1156 67 830

2x 2W - 2x 200LM - 2 step MacAdam - **A+**
Parallel wiring - 230VAC - - - -
Integrated 1-10V dimmable LED driver -
Standard narrowbeam 12° - Optional 8° beam

WASAABII SURFACE DUO 2x200LM CRI 92 DALI DIM

2700°K	3000°K
REF N° 1156 37 930	REF N° 1156 37 830

2x 2W - 2x 200LM - 2 step MacAdam - **A+**
Parallel wiring - 230VAC - - - -
Integrated DALI dimmable LED driver -
Standard narrowbeam 12° - Optional 8° beam

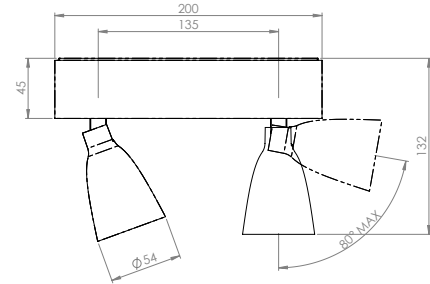

BEAM ANGLES

STANDARD (included) beam angle 12°
REF N° 203 20 008 (option) beam angle 8°