

TECHNICAL DATA SHEET

WASAABII 2x500LM SURFACE DUO IP20 INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable 0° - 80°
Surface mounted
Material: Aluminium



Ref N° 1100 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



Ref N° 1100 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco



Ref N° 1100 GREY

Grey
Grigio
Grau
Grijs
Gris
Gris



Ref N° 1100 MESSING

Brass
Otonne
Messing
Messing
Laiton
Latón



Ref N° 1100 BRONZE

Bronze
Bronzo
Bronze
Bronz
Bronze
Bronze






Ref N° 1101 00 001

Clip-on assessorly 1
Small ball

WASAABII SURFACE DUO 2x500LM CRI 92 PHASE DIM			
	2700°K	3000°K	
	REF N° 1156 78 930	REF N° 1156 78 830	
2x5,9W - 2x500LM - 2stepMacAdam - A+ Parallel wiring - 230VAC - - - - Integrated phase dimmable LED driver - Standard Perfectbeam 24° - Optional 44° beam			

WASAABII SURFACE DUO 2x500LM CRI 92 1-10V DIM			
	2700°K	3000°K	
	REF N° 1156 68 930	REF N° 1156 68 830	
2x5,9W - 2x500LM - 2stepMacAdam - A+ Parallel wiring - 230VAC - - - - Integrated 1-10V dimmable LED driver - Standard Perfectbeam 24° - Optional 44° beam			

WASAABII SURFACE DUO 2x500LM CRI 92 DALI DIM			
	2700°K	3000°K	
	REF N° 1156 38 930	REF N° 1156 38 830	
2x5,9W - 2x500LM - 2stepMacAdam - A+ Parallel wiring - 230VAC - - - - Integrated DALI dimmable LED driver - Standard Perfectbeam 24° - Optional 44° beam			

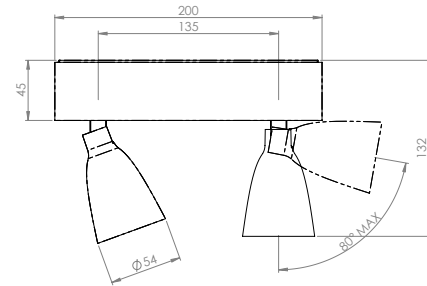

BEAM ANGLES

STANDARD (included) beam angle 24°
REF N° 203 20 044 (option) beam angle 44°