

TECHNICAL DATA SHEET

WASAABII 2x500LM SWING DUO TRACK DALI IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable 0° - 90°

Installation in 26 mm 48 VDC track

Material: Aluminium



Ref N° 1100 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



Ref N° 1100 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco



Ref N° 1100 GREY

Grey
Grigio
Grau
Grijs
Gris
Gris



Ref N° 1100 MESSING

Brass
Otonne
Messing
Messing
Laiton
Latón



Ref N° 1100 BRONZE

Bronze
Bronzo
Bronze
Brons
Bronze
Bronce



Ref N° 1101 00 001

Clip-on accessory 1
Small ball

WASAABII SWING DUO TRACK DALI 2x500LM CRI 92

	2700°K	3000°K	
	REF N° 1174 38 930	REF N° 1174 38 830	




2x5,9W - 2x500LM - 2stepMacAdam - **A+**
DALI dimmable - - - -
For installation in 26 mm 48 VDC track
Requires remote power supply 48 VDC
Standard Perfectbeam 24° - Optional 44° beam
Ultra low glare (UGR < 13)

REMOTE POWER SUPPLY ON/OFF

REF N° 648 00 050 50W

REF N° 648 00 150 150W

230V/50Hz - - constant voltage
 - - IP20 - 48VDC - not dimmable

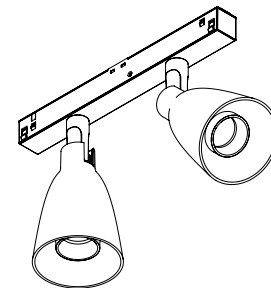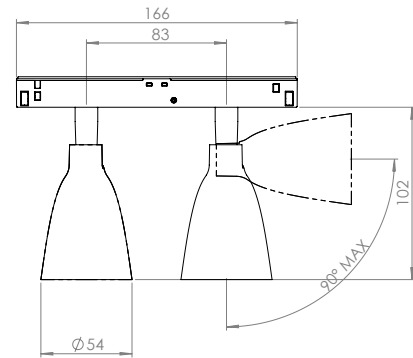

BEAM ANGLES

STANDARD (included) beam angle 24°

REF N° 203 20 044 (option) beam angle 44°