

# TECHNICAL DATA SHEET

## WASAABII XL 200LM FIX TRACK IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

Installation in 26 mm 48 VDC track

Material: Aluminium + Aluminium Tube



### Ref N° 1100 BLACK

Black  
Nero  
Schwarz  
Zwart  
Noir  
Negro



### Ref N° 1100 WHITE

White  
Bianco  
Weiß  
Wit  
Blanc  
Bianco



### Ref N° 1100 GREY

Grey  
Grigio  
Grau  
Grijs  
Gris  
Gris



### Ref N° 1100 MESSING

Brass  
Otonne  
Messing  
Messing  
Laiton  
Latón



### Ref N° 1100 BRONZE

Bronze  
Bronzo  
Bronze  
Brons  
Bronze  
Bronce



### Ref N° 1101 00 001

Clip-on accessory 1  
Small ball


WASAABII XL FIX TRACK 200LM CRI 92			
	2700°K	3000°K	
60cm REF N°	1172 17 906	1172 17 806	REF N° 60cm
90cm REF N°	1172 17 909	1172 17 809	REF N° 90cm
120cm REF N°	1172 17 912	1172 17 812	REF N°120cm

2 W - 200LM - 2 step MacAdam - **A+**  
on/off/pwm - - **CE** - -   
For installation in 26 mm 48 VDC track  
Requires remote power supply 48 VDC  
Standard narrowbeam 12°- Optional 8° beam  
Ultra low glare (UGR < 13)

REMOTE POWER SUPPLY ON/OFF	
REF N° 648 00 050	50W
REF N° 648 00 150	150W
230V/50Hz -  - constant voltage - <b>CE</b> - IP20 - 48VDC - not dimmable	

REMOTE POWER SUPPLY DIM	
REF N° 648 30 055	DALI 55W
REF N° 648 60 080	1-10V 80W
230V/50Hz -  - constant voltage - <b>CE</b> - IP20 - 48VDC - dimmable Dims all LED units on the 48VDC track	

(version 60cm) 692  
(version 90cm) 992  
(version 120cm) 1292

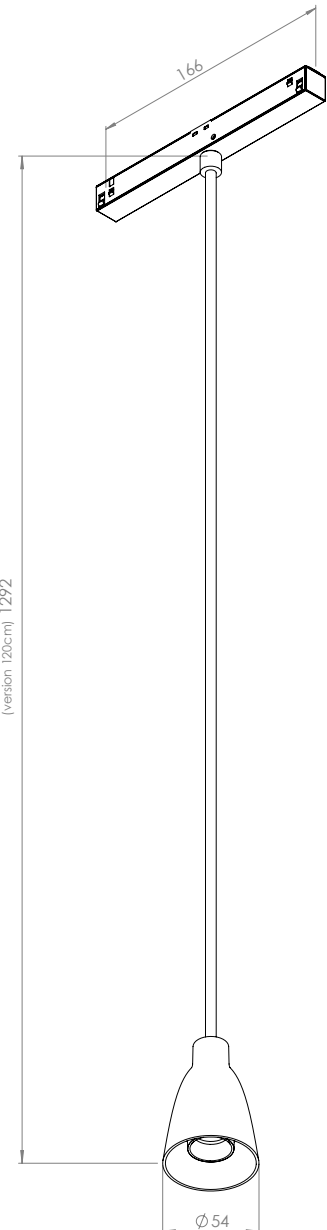

### BEAM ANGLES

**STANDARD** (included) beam angle 12°  
REF N° 203 20 008 (option) beam angle 8°