

# TECHNICAL DATA SHEET

## WASAABII XL 500LM FIX TRACK IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

Installation in 26 mm 48 VDC track

Material: Aluminium + Aluminium Tube



### Ref N° 1100 BLACK

Black  
Nero  
Schwarz  
Zwart  
Noir  
Negro



### Ref N° 1100 WHITE

White  
Bianco  
Weiß  
Wit  
Blanc  
Bianco



### Ref N° 1100 GREY

Grey  
Grigio  
Grau  
Grijs  
Gris  
Gris



### Ref N° 1100 MESSING

Brass  
Otonne  
Messing  
Messing  
Laiton  
Latón



### Ref N° 1100 BRONZE

Bronze  
Bronzo  
Bronze  
Brons  
Bronze  
Bronce



### Ref N° 1101 00 001

Clip-on accessory 1  
Small ball


WASAABII XL FIX TRACK 500LM CRI 92			
	2700°K	3000°K	
60cm REF N°	1172 18 906	1172 18 806	REF N° 60cm
90cm REF N°	1172 18 909	1172 18 809	REF N° 90cm
120cm REF N°	1172 18 912	1172 18 812	REF N°120cm

5,9 W - 500LM - 2 step MacAdam - **A+**  
 on/off/pwm - - **CE** - -   
 For installation in 26 mm 48 VDC track  
 Requires remote power supply 48 VDC  
 Standard Perfectbeam 24°. Optional 44° beam  
 Ultra low glare (UGR < 13)

REMOTE POWER SUPPLY ON/OFF	
REF N° 648 00 050	50W
REF N° 648 00 150	150W
230V/50Hz -  - constant voltage - <b>CE</b> - IP20 - 48VDC - not dimmable	

REMOTE POWER SUPPLY DIM	
REF N° 648 30 055	DALI 55W
REF N° 648 60 080	1-10V 80W
230V/50Hz -  - constant voltage - <b>CE</b> - IP20 - 48VDC - dimmable Dims all LED units on the 48VDC track	

(version 60cm) 692  
 (version 90cm) 992  
 (version 120cm) 1292

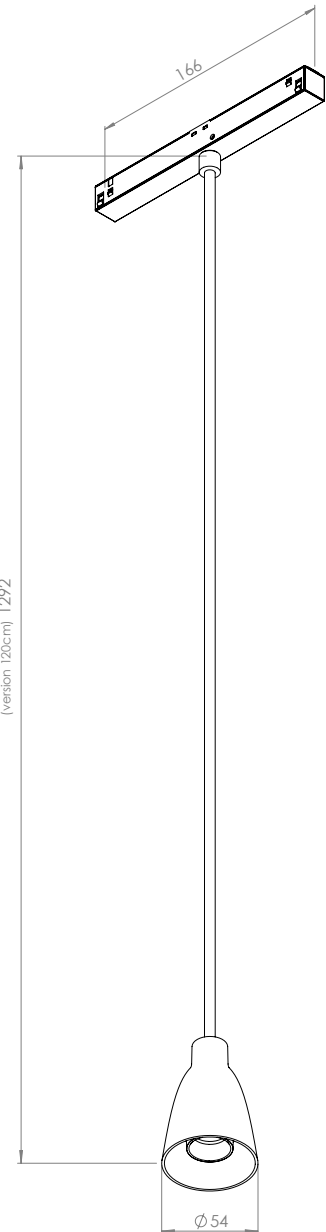

### BEAM ANGLES

**STANDARD** (included) beam angle 24°  
 REF N° 203 20 044 (option) beam angle 44°