

TECHNICAL DATA SHEET

WASAABII 500LM PENDANT MAXITRIM IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

☞ Ø43 mm - h = 45 mm

Material: Aluminium + Cable



Ref N° 1100 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



Ref N° 1100 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco



Ref N° 1100 GREY

Grey
Grigio
Grau
Grijs
Gris
Gris



Ref N° 1100 MESSING

Brass
Otonne
Messing
Messing
Laiton
Latón



Ref N° 1100 BRONZE

Bronze
Bronzo
Bronze
Brons
Bronze
Bronze



Ref N° 1101 00 001

Clip-on assessorry 1
Small ball

WASAABII PENDANT MAXITRIM IP54 500LM CRI 92

	2700°K	3000°K	
	REF N° 1120 28 931	REF N° 1120 28 831	

5,9 W - 500LM - 2 step MacAdam - **A+**
Serial wiring - - **CE** - -
Requires remote LED driver - 700mA
Standard Perfectbeam 24° - Optional 44° beam
Ultra low glare (UGR < 13)

INTEGRAL LED DRIVER

REF N° 697 67 015 15W DIM 1-10V Ø40 x 149mm

REF N° 697 37 015 15W DIM DALI Ø40 x 149mm

REF N° 697 77 010 10W PHASE DIM Ø42 x 94mm

230V/50Hz - - - **CE** - IP20 - 700mA
fits through the opening of Ø43mm

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled
 - **CE** - IP20 - 700mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 60W

1-10V DALI PUSH



REF N° 697 30 015 min 2W max 20W DALI

REF N° 697 60 015 min 2W max 20W 1-10V PUSH

REF N° 697 77 010 min 2W max 10W PHASE DIM

REF N° 697 77 020 min 11W max 20W PHASE DIM

230V/50Hz - - current controlled
 - **CE** - IP20 - 700mA - dimmable

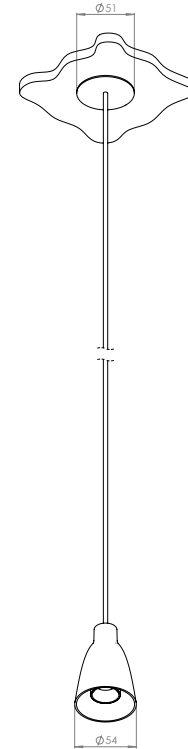

INSTALLATION KIT

REF N° 680 01 043 standard holesaw Ø 43 mm

PENDANT CABLE

REF N° 681 01 003 pendant cable black 3m

REF N° 681 02 003 pendant cable white 3m

REF N° 681 01 006 pendant cable black 6m

REF N° 681 02 006 pendant cable white 6m

BEAM ANGLES

STANDARD (included) beam angle 24°

REF N° 203 20 044 (option) beam angle 44°