

# TECHNICAL DATA SHEET

## AQUA UNO WATERDROP 1x500LM FIX TRIMLESS IP65

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

194x194 mm - h = 90 mm

Material: CALCYT® plaster



### AQUA UNO WATERDROP IP65 1x500LM WATERDROP CRI 92

2700°K	3000°K	
REF N° 323 28 000	REF N° 323 28 100	

5,8 W - 500LM - 2 step MacAdam - **F**  
 Serial wiring - - - -   
 Requires remote LED driver - 700mA

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled

- - IP20 - 700mA - not dimmable

### REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 60W

1-10V DALI PUSH

REF N° 697 30 015 min 2W max 20W DALI




REF N° 697 60 015 min 2W max 20W 1-10V PUSH

REF N° 697 77 010 min 2W max 10W PHASE DIM

REF N° 697 77 020 min 11W max 20W PHASE DIM

230V/50Hz - - current controlled

- - IP20 - 700mA - dimmable

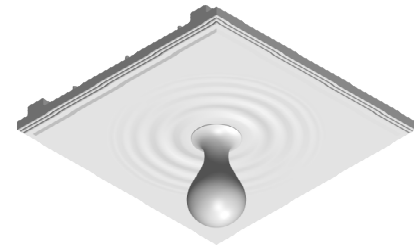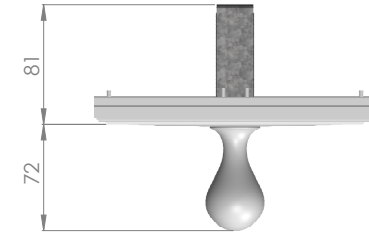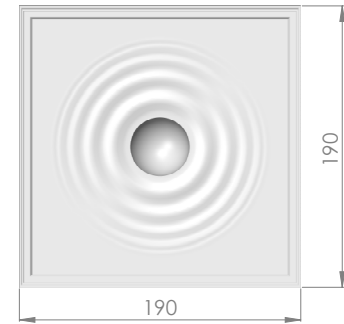

### INSTALLATION KIT

**STANDARD** (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 321 99 025 installation system for gypsum ceiling 25 mm

REF N° 321 99 030 installation system for gypsum ceiling 30 mm