

TECHNICAL DATA SHEET

ITALIC IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR


Fix (not adjustable) 0° - 0°

196x1160 mm

Material : CALCYT® plaster




reddot design award
winner 2012

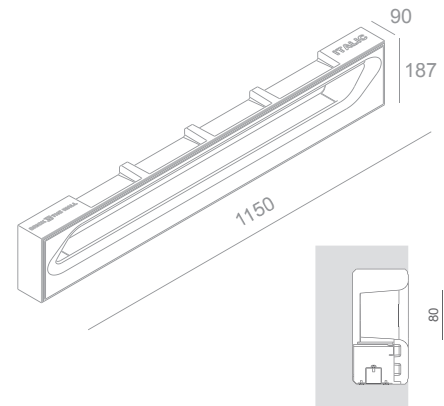

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT ITALIC

REF N° 715 01 000 For mounting into gypsum walls
Housing: perforated aluminium

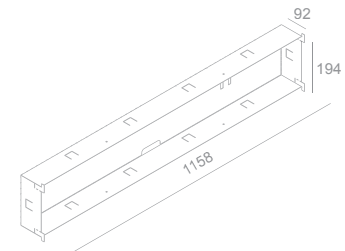

ITALIC FLUO

REF N° 315 15 021 on/off

REF N° 315 18 021 DIM 1-10V

REF N° 315 30 021 DIM DALI

1x T16 - 21/39W
G5 - 230V/50Hz - incl. EVG
0.5m - IP20 - 850°C
eco

ITALIC LED 3000LM 230 VAC

REF N°	2700°K	3000°K
on/off	315 25 000	315 25 100
DIM 1-10V	315 65 000	315 65 100
DIM DALI	315 35 000	315 35 100

230V/50Hz - 28,5W - 3000lm@65°C -
3300lm@25°C - IP20 - CRI 80
parallel wiring - 0.2m - 850°C
Integrated line voltage LED driver
Connects directly to 230 VAC
4 SDCM - 4 Step MacAdam - A

