

TECHNICAL DATA SHEET

ATMOS IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

510x510 mm

Material : CALCYT® plaster




reddot design award
winner 2010

DESIGN PLUS
powered by: light+building



product
design
award

2011

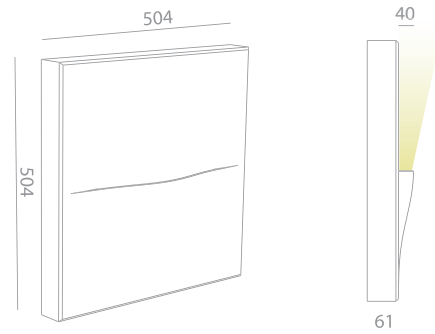

ATMOS LED 1000LM 230 VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	145 73 000	145 73 100	145 73 200
DIM 1-10V	145 63 000	145 63 100	145 63 200
DIM DALI	145 33 000	145 33 100	145 33 200

230V/50Hz - 6,8W - incl. line voltage LEDdriver
1000lm@85°C - **E** - **CE** - IP20
parallel wiring ∇ - I - 0.2m - 850°C P Q
2 SDCM - 2 Step MacAdam - CRI 80 - **A+**

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT ATMOS

REF N° 745 01 000 For mounting into gypsum walls
Housing: perforated aluminium

ATMOS LED WARM DIM 500LM 230VAC

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 145 71 600 phase DIM

REF N° 145 61 600 DIM 1-10V

REF N° 145 31 600 DIM DALI

230V/50Hz - 6,0W - incl. line voltage driver
 I - parallel wiring ∇ - I - 0.2m - **E** - **CE** - P -
4 Step MacAdam - CRI 80 - **B**

ATMOS LED 600LM 230 VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	145 71 500	145 71 000	145 71 100
DIM 1-10V	145 61 500	145 61 000	145 61 100
DIM DALI	145 31 500	145 31 000	145 31 100

230V/50Hz - 6,5W - incl. line voltage LEDdriver
600lm@85°C - 700lm@25°C - **E** - **CE** - IP20
parallel wiring ∇ - I - 0.2m - 850°C P Q
2 SDCM - 2 Step MacAdam - CRI 90 - **A**

