

TECHNICAL DATA SHEET


SLIM IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 95x550 mm

Material : CALCYT® plaster

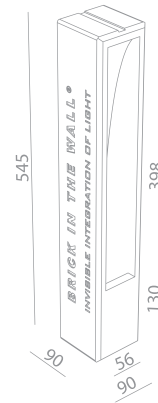

SLIM LED WARMDIM 500LM 230VAC
WARMDIM : DIMS FROM 3000°K TO 2000°K
REF N° 107 71 600 phase DIM
230V/50Hz - 6,0W - incl. line voltage LEDdriver □ - parallel wiring ▽ 0.2m E CE - P - 4 Step MacAdam - CRI 80 - B

SLIM LED WARMDIM 500LM REMOTE DRIVER
WARMDIM : DIMS FROM 3000°K TO 2000°K
REF N° 107 29 600 remote driver
230V/50Hz - 6,0W - requires remote LEDdriver □ - serial wiring ▽ 0.2m E CE - P - 4 Step MacAdam - CRI 80 - B

SLIM LED 1000LM 230 VAC			
REF N°	2700°K	3000°K	4000°K
phase DIM	107 73 000	107 73 100	107 73 200
230V/50Hz - 6,8W - incl. line voltage LEDdriver □ - parallel wiring ▽ 0.2m E CE - P - 2 Step MacAdam - CRI 80 - A+			


SLIM LED 1000LM REMOTE DRIVER			
REF N°	2700°K	3000°K	4000°K
excl. driver	107 27 000	107 27 100	107 27 200
230V/50Hz - 6,8W - requires remote LEDdriver □ - serial wiring ▽ 0.2m E CE - P - 2 Step MacAdam - CRI 80 - A+			

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT SLIM
REF N° 707 01 000 For mounting into gypsum walls
Housing: perforated aluminium

SLIM LED 600LM 230 VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	107 21 500	107 21 000	107 21 100
230V/50Hz - 6,5W - incl. line voltage LEDdriver □ - parallel wiring ▽ 0.2m E CE - P - 2 Step MacAdam - CRI 90 - A			

SLIM LED 600LM REMOTE DRIVER			
REF N°	2200°K	2700°K	3000°K
excl. driver	107 29 500	107 29 000	107 29 100
230V/50Hz - 6,5W - requires remote LEDdriver □ - serial wiring ▽ 0.2m E CE - P - 2 Step MacAdam - CRI 90 - A			



SLIM HAL
REF N° 107 01 040
QT14 - max 40W - G9 230V/50Hz - - E CE - D

REMOTE LED DRIVER DIM
REF N° 697 60 040 DIM 1-10V DALI PUSH 30W
230V/50Hz - - current controlled ▽ - CE - IP20 - 250mA/350mA

