

# TECHNICAL DATA SHEET


## NORMALL S IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 225x380 mm

Material : CALCYT® plaster

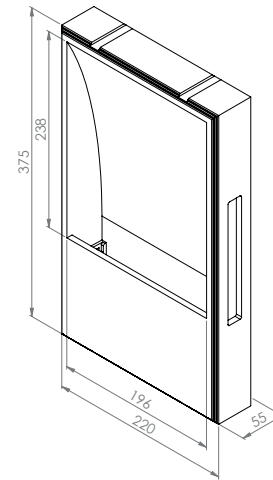

### NORMALL S LED WARM DIM 900LM 230VAC

WARM DIM : DIMS FROM 3000°K TO 2000°K

REF N° 115 73 600 phase DIM

REF N° 115 63 600 DIM 1-10V

REF N° 115 33 600 DIM DALI

230V/50Hz - 12,8W - incl. line voltage driver  
 ◇ - parallel wiring ▽ 0.2m E-CE - Ⓢ -  
 4 Step MacAdam - CRI 90 - B

### NORMALL S LED 800LM 230VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	115 71 500	115 71 000	115 71 100
DIM 1-10V	115 61 500	115 61 000	115 61 100
DIM DALI	115 31 500	115 31 000	115 31 100

230V/50Hz - 9,3W - incl. line voltage driver  
 ◇ - parallel wiring ▽ 0.2m E-CE - Ⓢ -  
 2 Step MacAdam - CRI 90 - R9=75 - A

### NORMALL S LED 1000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	115 72 000	115 72 100	115 72 200
DIM 1-10V	115 62 000	115 62 100	115 62 200
DIM DALI	115 32 000	115 32 100	115 32 200

230V/50Hz - 11W - incl. line voltage driver  
 ◇ - parallel wiring ▽ 0.2m E-CE - Ⓢ -  
 2 Step MacAdam - CRI 90 - R9=75 - A

### NORMALL S LED 2000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	115 74 000	115 74 100	115 74 200
DIM 1-10V	115 64 000	115 64 100	115 64 200
DIM DALI	115 34 000	115 34 100	115 34 200

230V/50Hz - 14,1W - incl. line voltage driver  
 ◇ - parallel wiring ▽ 0.2m E-CE - Ⓢ -  
 2 Step MacAdam - CRI 80 - A+

Ready for installation in solid walls  
 Optional plasterkit for installation into gypsum walls

**PLASTERKIT NORMALL S**  
 REF N° 715 01 000 For mounting into gypsum walls

