

# TECHNICAL DATA SHEET


## XT IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 329x607 mm

Material : CALCYT® plaster

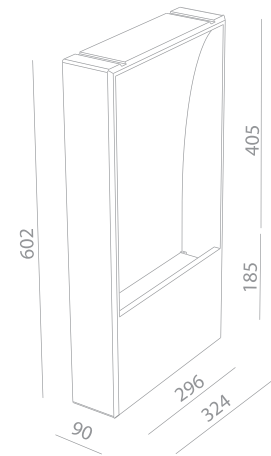

### XT LED 2000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	108 74 000	108 74 100	108 74 200
DIM 1-10V	108 64 000	108 64 100	108 64 200
DIM DALI	108 34 000	108 34 100	108 34 200

230V/50Hz - 14,1W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m E-CE - P -  
2 Step MacAdam - CRI 80 - A+

### XT FLUO 42W

REF N° 108 01 042

TC-TEL 42W  
GX24q-4 - 230V/50Hz - ◊ - incl. EVG  
▽ - 0.5m E-CE - IP20 - 850°C  
P - eco

### XT FLUO 57W

REF N° 108 01 057

TC-TEL 57W  
GX24q-5 - 230V/50Hz - ◊ - incl. EVG  
▽ - 0.5m E-CE - IP20 - 850°C  
P - eco

Ready for installation in solid walls  
Optional plasterkit for installation into gypsum walls

### PLASTERKIT XT

REF N° 708 01 000 For mounting into gypsum walls

